


Surface Mount Rectifier Markings

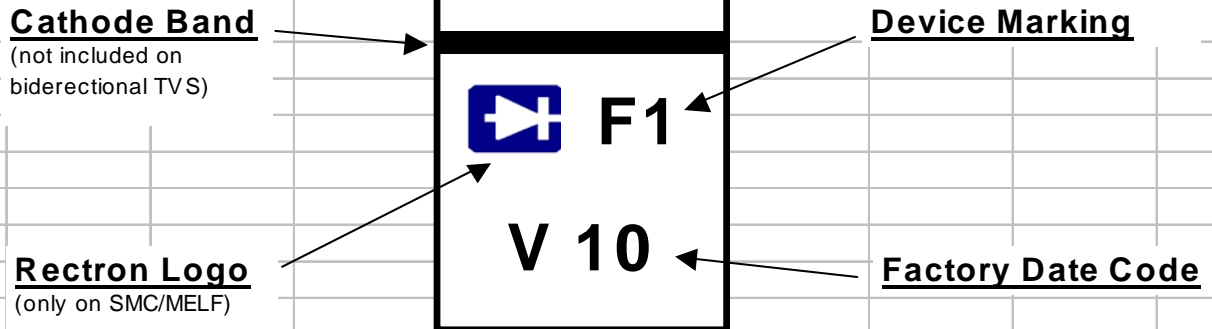

Factory Date Code "XYZ": "X" = Factory code, "Y" = Last digit of the year, "Z" = Month number/letter

Examples

Part No.	FFM101	FFM102	FFM103	FFM104	FFM105	FFM106	FFM107
Marking	F1	F2	F3	F4	F5	F6	F7

Factory Date Code: "V05" : 2000, May; "V1N" : 2001, November

Device Markings

SMA

Part number	Device Marking	Part number	Device Marking
FFM101 to FFM107	F1 to F7	HFM101 to HFM108	H1 to H8
FM4001 to FM4007	A1 to A7	EFM101 to EFM106	E1 to E6
FM4933 to FM4937	R3 to R7	FM120 to FM1100	S2 to S10
FM5817 to FM5819	K7 to K9		
P4FMAJ6.8 to P4FMAJ170CA	AP6.8 to AP170CA	TFMAJ6.8 to TFMAJ170CA	TA6.8 to TA170CA

SMB

Part number	Device Marking	Part number	Device Marking
FFM201 to FFM207	2F1 to 2F7	HFM201 to HFM208	2H1 to 2H8
FM201 to FM207	2B1 to 2B7	EFM201 to EFM206	2E1 to 2E6
FM220 to FM2100	2S2 to 2S10		
P6FMBJ6.8 to P6FMBJ170CA	BP6.8 to BP170CA	TFMBJ6.8 to TFMBJ170CA	TB6.8 to TB170CA



Device Markings

SMC

Part number	Device Marking	Part number	Device Marking
FFM301 to FFM307	3F1 to 3F7	HFM301 to HFM308	3H1 to 3H8
FM301 to FM307	3C1 to 3C7	EFM301 to EFM306	3E1 to 3E6
FM5820 to FM5822	K0 to K2	FM320 to FM3100	3S2 to 3S10
1.5FMCJ6.8 to 1.5FMCJ170CA	CP6.8 to CP170CA	TFMCJ6.8 to TFMCJ170CA	TC6.8 to TC170CA

MELF

Part number	Device Marking	Part number	Device Marking
FSM101 to FSM107	F1 to F7	HSM101 to HSM108	H1 to H8
SM4001 to SM4007	A1 to A7	ESM101 to ESM106	E1 to E6
SM4933 to SM4937	R3 to R7	SM120 to SM160	S2 to S6
SM5817 to SM5819	K7 to K9		